
Vault


C-Scroll


Roundel

These installation instructions are valid with the above Ametrix styles.

Large, OUTDOOR YR (16.5")

(Yoke mount**, R**emote ballast**)**

Visor and Non-Visor

Warning: Before starting any work ensure that all sources of power are turned off. All work must meet local/national codes and be performed by a certified electrician. **Do not** mount fixtures vertically.

Exploded view and part call-out

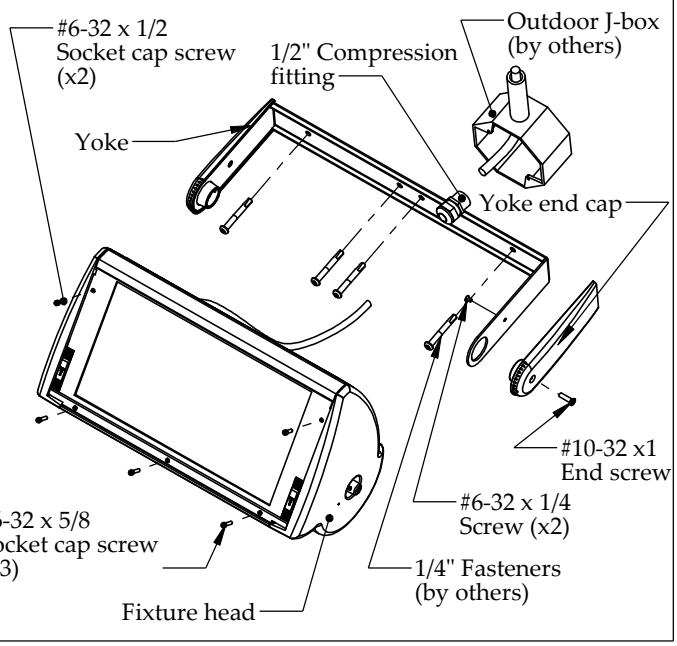

1 Mounting yoke to outdoor surface

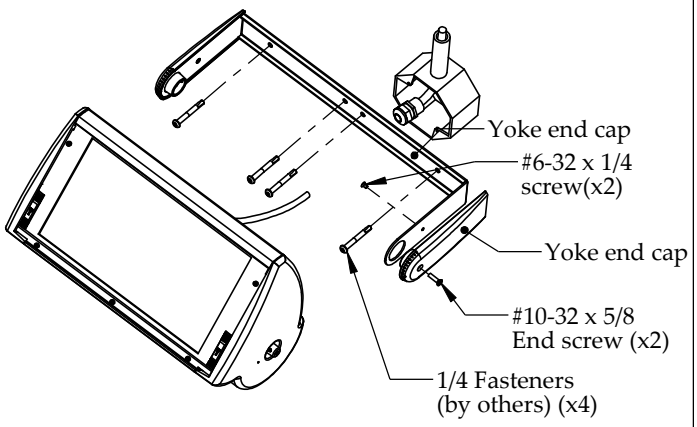

1. To secure yoke to outdoor surface, the fixture head must be removed. First, remove both #10-32 x 5/8 end screws.
2. Remove **one** #6-32 x 1/4 screw to remove yoke end cap and fixture head. Place both fixture head and yoke end cap in a safe place.
3. With fixture head and yoke end cap safely stored, secure yoke to outdoor surface using four(4) appropriate 1/4" fasteners (by others).

2 Wiring and sealing outdoor fixture

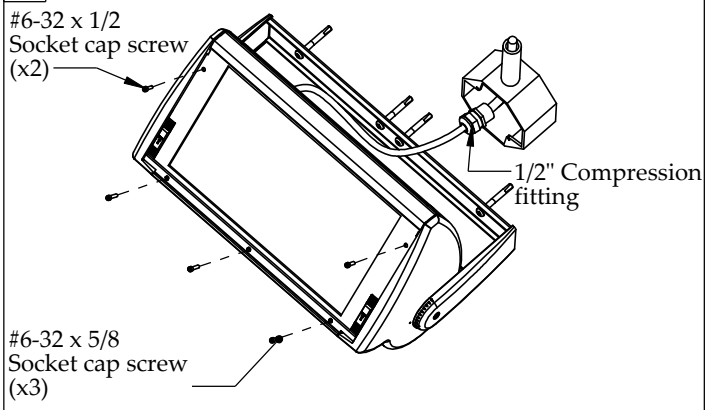

1. To seal fixture head, after installing lamp, all screws and latches must be secured on door face. Holes above latches receive the #6-32 x 1/2 socket cap screws. The center hole(s) receive the longer #6-32 x 5/8 socket cap screw.
2. Slide 1/2" compression fitting down fixture head wire and splice wit power feed, ensuring all connections are properly matched. Seal 1/2" compression fitting to outdoor surface and ensure a watertight seal.

3 Aiming the fixture

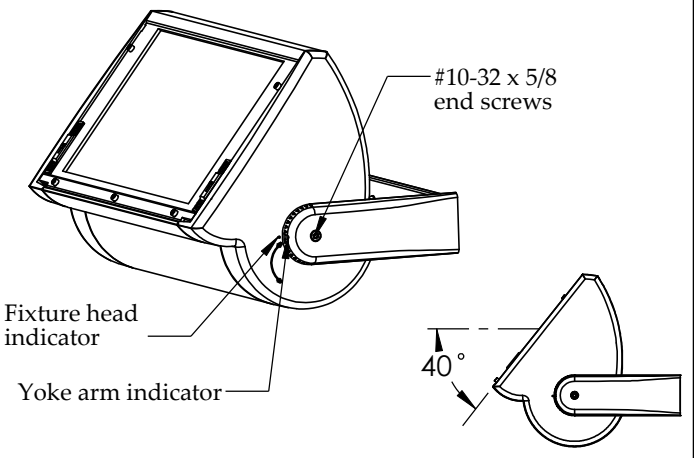

1. To aim fixture, loosen both #10-32 x.625 end screws. When the PointGrab™ system indicators are lined up, the slope of the lens face is 40-degrees. Each subsequent notch is an additional 10-degrees.
2. When the fixture head is adjusted to the desired angle, re-tighten end screws to secure the position.

Ametrix
4675 Holly Street
Denver, CO 80216
P: 303-393-1522
www.ametrixlighting.com

Cooper Lighting
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com


Vault w/ visor


C-Scroll w/ visor


Roundel w/ visor

These installation instructions are valid with the above Ametrix styles

Large, OUTDOOR YR (16.5")

(Yoke mount**, R**emote ballast**)**

Visor and Non-Visor

Warning: Before starting any work ensure that all sources of power are turned off. All work must meet local/national codes and be performed by a certified electrician. **Do not** mount fixtures vertically.

Mounting Plate Dimensions In [mm]

Mounting dimensions are for 16 1/2"(419.1mm) large YR indoor only

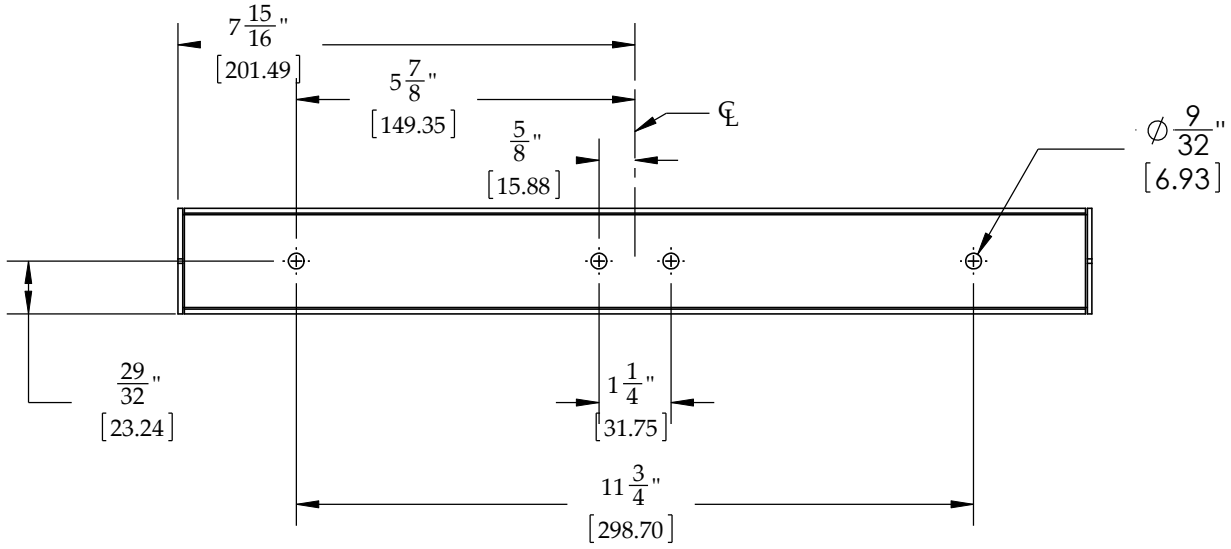

Lamping Size Chart

(lamps provided by others)

FIXTURE SIZE (inches/ mm)	WATTAGE	# OF LAMPS	LAMP TYPE	LAMP DESCRIPTION	Lamp (not to scale)
16 1/2 / 419.1	32 W	1	T4	Compact Flourescent	
16 1/2 / 419.1	42 W	1	T4	Compact Flourescent	
16 1/2 / 419.1	57 W	1	T4	Compact Flourescent	
16 1/2 / 419.1	100 W	1	ED17	Ceramic Metal Halide	
16 1/2 / 419.1	150 W	1	T6	Ceramic Metal Halide	
16 1/2 / 419.1	175 W	1	ED17	Ceramic Metal Halide	

Ametrix
4675 Holly Street
Denver, CO 80216
P: 303-393-1522
www.ametrixlighting.com

Cooper Lighting
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com